



MANUAL CONFIGURATION

QUICK AND EASY STEPS

Have you just purchased an AGRUMINO device and don't know how to configure it?

No problem! Read this guide and you will have no problem, alternatively write to:

info@lifely.cc



powered by



PACKAGE CONTENTS

● AGRUMINO ORANGE

Our device offers the ability to monitor and care for plants through the analysis of crucial data such as temperature, humidity, and ambient brightness.

● ALKALINE BATTERIES

Lifely-labeled AAA alkaline batteries, packaged together by a 0% mercury- and cadmium-free shrink wrap, provide reliable power. **It is important to note that these batteries are not rechargeable.**

● WATERPROOF CASE

Each device comes with a waterproof silicone case designed to protect it from the elements. The case is available in various colors, including green, purple, gray, green and fluorescent purple.

● STICKERS

Add a touch of personality to your device with our personalized, logo-marked stickers.



* After the batteries are completely depleted, they can be replaced with standard AAA alkaline batteries.


STEP I:

PREPARE THE DEVICE

Before starting the device configuration, it is important to follow these simple steps.

1. Carefully remove the silicone cover covering the device (supplied already fitted), making sure to handle it carefully. Once this is completed, the device will look as shown in **Figure 1**.
2. Proceed with inserting the batteries, provided inside the package, taking care to observe the correct polarity. Refer to **Figure 2**. for a visual reference.
3. Check that the button (shown in **Figure 3**.) is set to “on.” In case it is not make the change.
4. After completing these steps, you should carefully place the cover back on the device to protect it from the elements.

AT THIS POINT, WE ARE READY TO START CONFIGURING THE DEVICE.

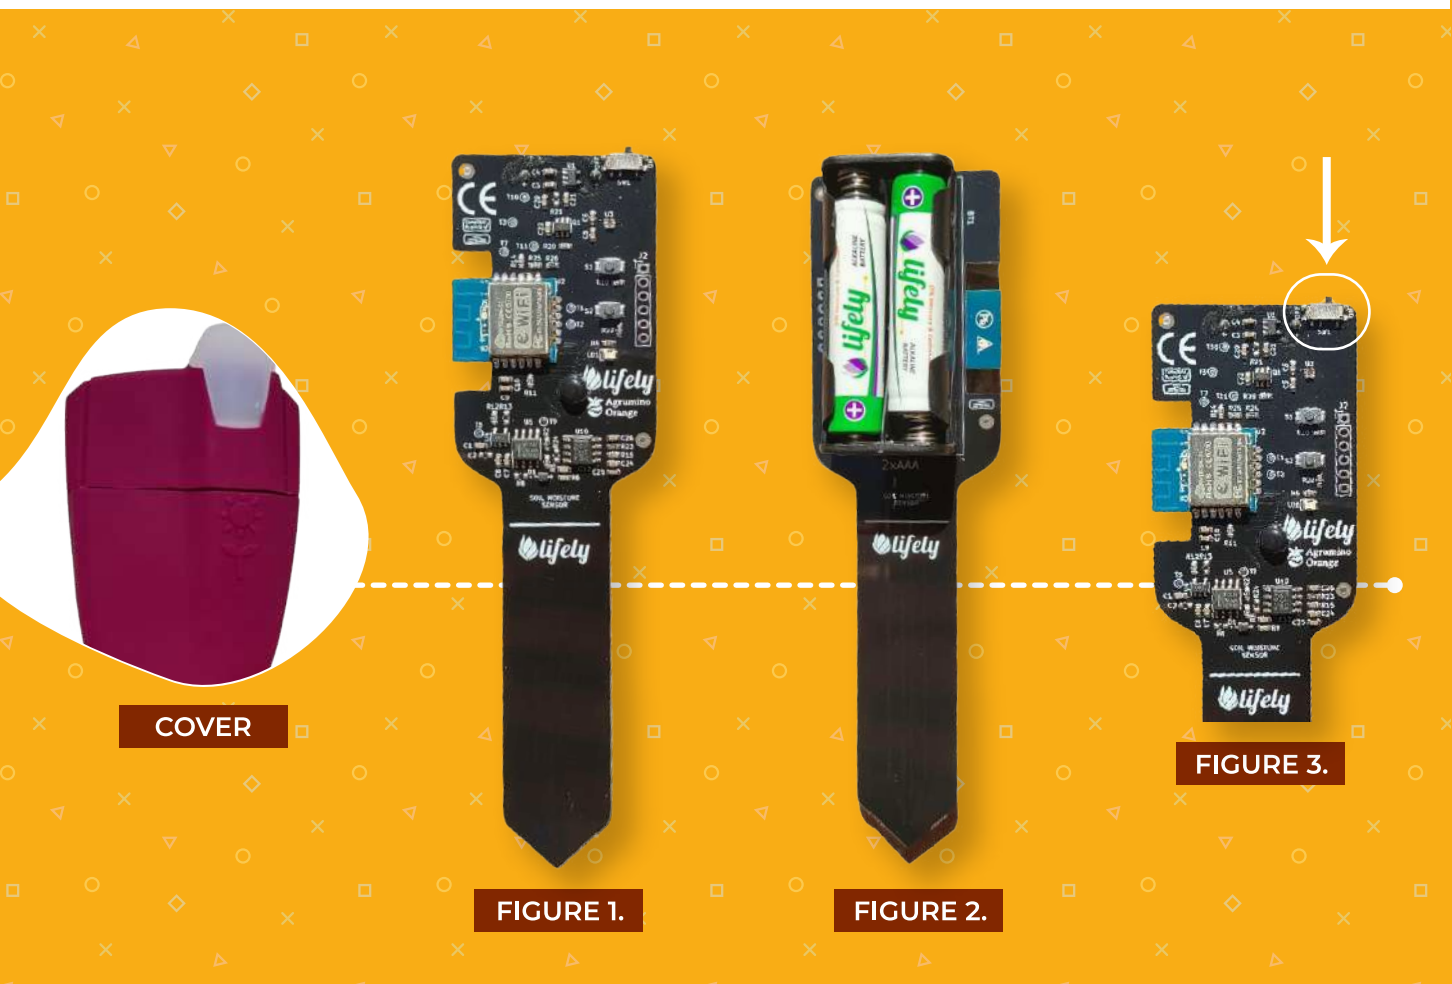

SOME DETAILS: THE DEVICE

In the part highlighted in **FIGURE 4** are two buttons called **S1** and **S2**, which correspond to the **RESET** and **CUSTOM** buttons, respectively.

These will be discussed in detail in the section on Wi-Fi configuration. The S1 and S2 buttons correspond exactly to the “Sun” and “Leaf” images on the cover and highlighted in **FIGURE 5**.



STEP II: DOWNLOAD APPLICATION

In order to take advantage of the features of Agrumino Orange, it is essential to proceed with the download of the corresponding application.

In case you are using an Android device, it is recommended to download the application from the Play Store.

Conversely, for iPhone users, the application can be found in the Apple Store.

The name of the application to search for is “Lifely.”



ANDROID

IOS

STEP III:

ACCOUNT REGISTRATION

- 1. Open the Lifely app from your phone.
- 2. Click on the “Register” button and enter the data you will be asked for, such as: First Name, Last Name, Date of Birth, City, Email, Password.
- 2.1 If you already have an account, you will simply need to log in using your e-mail and password.



FORGOT YOUR PASSWORD?

If you already have an account but can't remember your password, no problem! Click on “**I forgot my password,**” and a screen will open asking you to enter the email with which you created the account. Next, you will be sent an email containing all the steps you need to follow to reset your password. If you experience any problems, we recommend that you email info@lifely.cc.



N.B. IF YOU ALREADY HAVE AN ACCOUNT WITH AN EMAIL, THAT EMAIL CANNOT BE USED TO ACTIVATE A NEW ACCOUNT, BUT YOU CAN “RETRIEVE PASSWORD”.

STEP IV:

PREPARE THE AGRUMINO ORANGE DEVICE FOR WI-FI NETWORK CONFIGURATION

1. Insert the batteries and turn on the device using the SW1 switch.
2. Immediately after powering on, press and hold the S1 button (identified by the sun symbol on the cover or by the label "S1" on the device silkscreen).
3. After a few seconds, the LED will start blinking slowly.
4. Release the button as soon as the slow blinking begins: the LED will stay steadily on (in any case, this should happen within 20 seconds).
5. The device is now in Captive Portal mode and creates a Wi-Fi network named Agrumino-XXXXXX.
6. Connect to this network using your smartphone or PC. If the page does not open automatically, enter 192.168.4.1 in your browser.
7. Enter the Wi-Fi network details or scan for available networks, type in the password, press Save, and wait for the automatic reboot.

The device should now be connected to the network – verify the connection using the Lively App.

STEP V:

CONFIGURE THE AGRUMINO ORANGE DEVICE

1. Click on the "+" to add your first plant (figure 6).
2. Enter a photo of your plant, a name, select the relevant category (Vegetables or Plants), select the plant, and finally proceed with entering the device ID (e.g., citrus-xxx) found in the box, you can also scan the QR-Code or enter the code manually (Figure 7).
3. Click "NEXT" and proceed with the configuration of Wif-fi (Figure8).
4. If everything has been entered correctly you will be faced with this screen (Figure 8).At this point all you have to do is click on "Configure" and proceed with the wi-fi configuration.



FIGURE 6.



FIGURE 7.



FIGURE 8.

STEP VI: CONFIGURE WI-FI

Once the plant has been added, you will see the screen shown in figure 8. If you have correctly followed all the steps described in Step IV, you will not encounter any problems and will simply need to click on **“Configure.”** Remember that correctly setting up the Wi-Fi network for the Agrumino device is crucial to ensure proper operation. In the following sections, you will find detailed instructions to continue the configuration process for both Android and iOS devices.

Carefully following these steps will allow you to establish proper device functionality.

ANDROID VERSION

1. Click on “CONFIGURE” and then select the Agrumino ID for which you want to set up the network.
2. Select the Wi-Fi network to be used for your device configuration (you should already find it if you completed Step IV).
3. Enter your network password and wait. Please do not close the following screen until the final Wi-Fi configuration screen appears.

Once these simple steps are completed, you can safely return to the app's homepage and view your garden.

CONFIGURATION COMPLETED!



NOTE

Configuring the Wi-Fi network on the device can be done either after adding the plant(recommended) or at a later time. The latter option can be accomplished by selecting the “Configuration” item from the profile, or by going directly to the settings and selecting the Wi-Fi network configuration section.


IOS VERSION

To proceed with Wi-Fi network configuration on an iOS device, a sequence of steps must be followed.

Initially, it is essential to register the Agrumino in accordance with the instructions provided in **Section IV**. Next, it is recommended to disable mobile data and enable Wi-Fi, making sure to enable GPS service. Once you have completed these preliminary steps, you can access the **“Wi-Fi”** menu on your iOS device. From the available options, locate and select the network corresponding to the Agrumino name. Once selected, click **“Connect to network.”**


A new screen will then open where you will be able to configure the Wi-Fi connection by entering data about your network and confirm the changes by selecting **“Save.”** At this point, the Wi-Fi network configuration will be successfully completed on your iOS device.

CONFIGURATION COMPLETED!

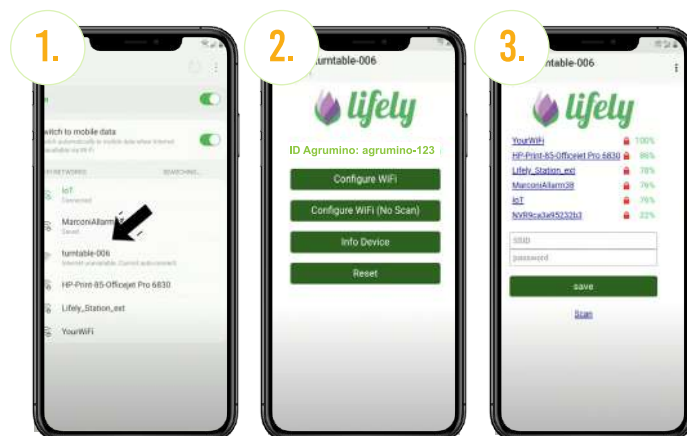

OTHER USEFUL INFO RESET DEVICE

1. Turn on the device.
2. Press and hold the S1 button — the LED will start blinking.
3. After about 20 seconds, the LED will begin to blink much faster than before.
4. Release the button as soon as the fast blinking starts: the device will perform a full reset, deleting all stored Wi-Fi settings and clearing the memory.
5. Turn the device off and back on again — the LED will light up without blinking: the device is now ready for a new configuration via Captive Portal.

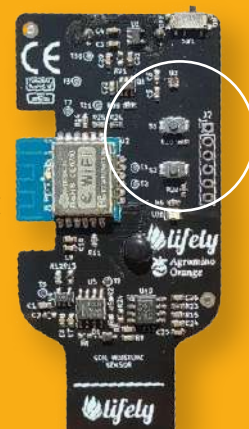

info@lifely.cc
www.lifely.cc

